


開合簾面板&捲簾面板

Switch Panel

P-T-06-2CPT
P-T-06-2RCPT

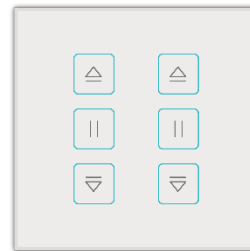

6 按鍵開合簾/捲簾面板是窗簾控制終端，控制兩路開合簾的開啟、閉合，兩路捲簾的上下移動。

The Switch Panel is a curtain control terminal that controls the opening and closing of the curtain, and the roller shutter moves up and down.


性能特點/ Features

- | | |
|--|--|
| <ul style="list-style-type: none"> ● 控制窗簾類設備 ● 設備升級 ● 設備搜尋和指示 | <ul style="list-style-type: none"> ● Control curtain equipment ● Device update ● Device search and indication |
|--|--|

技術參數/ Specifications

- | | |
|---|--|
| <ul style="list-style-type: none"> ● 工作電壓：AC 85V ~ 260 V ● 工作頻率：50/60Hz ● 待機功耗：小於 0.5W ● 供電方式：零火線供電 ● 通訊方式：電力線載波 ● 工作環境氣氛：無腐蝕性氣體，無易燃、易爆性氣體，無粉塵侵擾，無光源、熱源直接輻照 ● 海拔高度：小於 3000 米 ● 儲存溫度：-40°C ~ 70°C ● 安裝方式：86 盒安裝 ● 工作環境溫度：-10°C ~ 50°C ● 工作環境相對濕度：5%RH ~ 90%RH ● 外型尺寸(L*W*H)：86*86*40mm | <ul style="list-style-type: none"> ● Operating voltage: AC 85V~260V ● Operating frequency: 50/60Hz ● Power consumption: < 0.5W ● Power source: AC neutral and live line ● Communication technology: power line communication ● Working environment: no corrosive gas, no flammable, no explosive gas, no dust intrusion, no light source, no direct heat radiation ● Altitude :< 3000M ● Storage temperature: -40°C ~ 70°C ● Installation type: 86mmx86mm mounting box ● Ambient temperature: -10°C ~50°C ● Ambient humidity: 5%RH ~ 90%RH ● Dimensions(L*W*H): 86*86*40mm |
|---|--|

接線圖/ Wiring Diagram

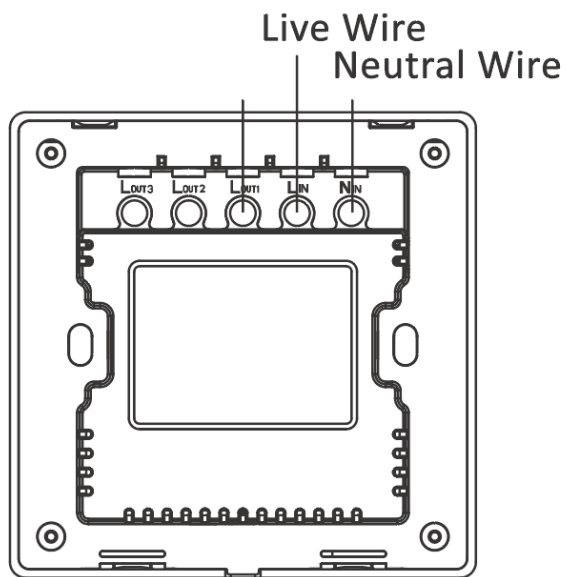

訂貨型號/ Order Model

P-T-06-2CPT
P-T-06-2RCPT